Need to move, lift or transport a load? The Hydrobull range of products offers a suitable solution whatever your application



Lightweight floor crane, splayed, folds up

		F500VK	F1000VK
Capacity	kg	500-300	1000-600
Max. lift height	mm	2700	2400
Jib length	mm	1470	1470
Free jib in front of hydr./wheels	mm	1150/**0**	1085/**0**
Clearance width	mm	⩛ 903	⩛ 903
Clearance height	mm	1700	1750
Weight	kg	150	150



*Lightweight floor crane for occasional use. Lifts via special pump, handoperated, **splayded chassis,** which folds up easily and is still movable, **standing system unique by Hydrobull®** for improved safety., **manufactured by Hydrobull®**, parking brake, complete including declaration of conformit, CE.*



Lightweight floor crane, parallel, folds up

		F500PK	F1000PK	L1500	L2000
Capacity	kg	500-300	1000-600	1500-500	2000-600
Max. lift height	mm	2700	2400	1825	1910
Jib length	mm	1470	1470	1825	1910
Free jib in front of hydr./wheels	mm	1150/**0**	1085/**0**	1320/**0**	1410/**0**
Clearance width	mm	⩡ 903	⩡ 903	1150	1350
Clearance height	mm	1700	1750	1935	1935
Weight	kg	150	150	195	245

*Lightweight floor crane for occasional use Type F 500PK + F 1000PK. Lifts via special pump, hand-operated. Crane with **parallel chassis** which folds up easily and is still movable, **standing system** unique by Hydrobull for improved safety, **manufactured by Hydrobull®**, parking brake, complete including declaration of conformity, CE.*
*TypeL1500 + L 2000 **european production**, lifts via double action pump, can be dismantled in 3 parts using standing or ordinary tools. Including declaration of conformity, CE.*



Counterweight crane with large free jib in front of the wheels

		BK150	BK250	BK350	BK550
Capacity	kg	150-80	250-90	350-120	550-200
Max. lift height	mm	2920	2920	2920	2920
Jib length	mm	2050	2050	2050	2050
Free jib in front of hydr./wheels	mm	1740	1740	1740	1740
Clearance width	mm	1500	1500	1500	1500
Clearance height	mm	750	750	750	750
Weight	kg	350	360	450	610

Counterweight crane for occasional use. Lifts via double action pump, hand operated, collapsible.
***Manufactured by Hydrobull®**, special executions on request, solid steel construction, intelligent parking brake, crane brakes when draw bar is raised. Including counterweight filling, including declaration of conformity.*
Shorter chassis length on request.



Counterweight crane with large free jib in front of the wheels (modern design)

		ITI250	ITI350	ITI500	ITI500Batt.Hub
Capacity	kg	250-80	350-110	500-175	500-220
Max. lift height	mm	2800	2800	2800	2800
Jib length	mm	2085	2085	2085	2085
Free jib in front of wheels	mm	1625	1625	1625	1625
Chassis length (wheelbase)	mm	1500	1500	1500	1500
Chassis width	mm	800	800	800	800
Weight with counterweight	kg	400	435	470	500

Counterweight crane for occasional use. Lifts via double-action pump or motor (Batt.Hub).
*Operated by hand or motor operated lifting gear. Brand-new **Hydrobull®** protected crane design.*
Intelligent parking brake – crane brakes when draw bar is raised. Delivery includes counterweight filling.
***Manufactured by Hydrobull®**. Special versions on request. Including declaration of conformity, CE.*
Motor cranes (battery included) with electric driving impulsion see additional prospect.

Industrial Crane

Hydrobull industrial floor cranes are sturdy, reliable and durable. Hydrobull industrial floor cranes are suitable for **continuous use in production** applications. Industrial floor cranes are equipped a rapid lift pump manufactured by Hydrobull, a separate pump and a cylinder for precision lowering and for maintenance of the load over long periods at a selected lift height. The pump offers 4 speeds for rapid load-free lifting and easier lifting with a load. Heavy-duty wheels with bearings. **German branded product manufactured by Hydrobull** made of certified steel from tested welders, fully compliant with special industry standard DIN 18800.7. Test manual provided with product. Complete with safety swivel hook and foot protection, jib arm safety catch, unique Hydrobull steering brake draw bar. Delivery always with crane book and declaration of conformity, CE.

For full technical and up-to-date information on all our models please go to our homepage:

www.hydrobull.de or www.hydrobull.com - Call us to discuss your requirements!



Industrial floor crane with parallel chassis

		HB1000N	HB2000N	HB3000N	HB1000BATT
Capacity	kg	1000-90	2000-155	3000-200	1000-185
Max. lift height	mm	3750	4900	4900	3750
Free jib in front of hydraulic	mm	2500	3200	3200	2500
Free jib in front of wheels	mm	1488	1730	1635	1225
Clearance width	mm	980	1250	1600	980
Clearance height	mm	1625	1950	1950	1650
Weight	kg	300	500	800	325

Other load capacities also available with battery operated lift!
Precision mechanical drive recommended and required for model HB3000N



Counterweight industrial crane with large free jib in front of the wheels

		HB500GK	HB1000GK	HB2000GK	HB2000GKlang
Capacity	kg	500-240	1000-240	2000-400	2000-200
Max. lift height	mm	3000	3000	4200	5100
Free jib in front of hydraulic	mm	1550	1550	2200	3250
Free jib in front of wheels	mm	1630	1630	2075	3125
Clearance width	mm	800	800	945	1000
Wheelbase	mm	**990**	1590	1980	2250
Weight	kg	350	350	520	615
Counterweight optional	kg	850	850	1490	1550

***Strongly** recommended: precision mechanical drive*



Industrial crane with swivelling jib.

		HB300GS90	HB500GS270	800GS100	HB1500GS360
Capacity	kg	300-120	500-210	800-240	1500-250
Pivoting Range	degree	90	270	100	360
Max. lift height	mm	3000	3235	3235	4600
Free jib in front of wheels	mm	1450	1500	1550	2035
Clearance width	mm	900	1000	1000	1360
Clearance height	mm	1660	1900	1900	2250
Weight	kg	700	900	1400	1630

***Strongly recommended: precision mechanical drive.** (Winch optional). Please contact us to request other load capacities*



Precision mechanical drive for floor cranes

Used to complement main electrical drive
- Position floor cranes with millimetre accuracy!
- Approach delicate or expensive equipment and materials with confidence.
- Operated by pumping the draw handle.
- Fine control with a fifth of the effort normally required.

NEW! The precision drive can also be fitted to your existing Hydrobull® floor cranes.

Other options on offer: mechanical jib extension by hand wheel;winches on request

Contact us to discuss your requirements! Subject to technical changes without prior notice.
ⓓ *= protected design registered in German patent authorities.*

HydroBull® seit 1934

Europe‘s most comprehensive range of Floor Cranes

Hydrobull custom Cranes Built to Customer Specifications



"Cranes customised to your design"

Please complete the questionnaire below and fax or mail back to your address

We provide transport and lifting solutions customised to your requirements based on seven decades of manufacturing experience!

Europe’ s most comprehensive range of floor cranes!

Please complete this form, and fax or mail it back to us.


First please respond to the following key question.

Yes

Please provide the required dimensions for the "Standard Model"

⇩

Load access: Can the crane drive under or around the load?




No!

Please provide the required dimensions for the "Counterweight Model"

⇩


Standard Model

Lifting capacity in kg

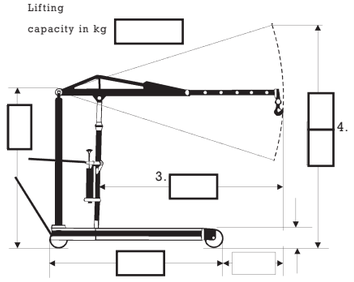

Counterweight Model

Lifting capacity in kg

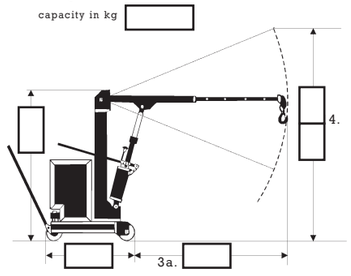

My address details

company name

address and telephone number

Then please also respond to the following questions

1. What type of load, which you do you need to lift? And how often ?

2. What is the required lifting capacity? kg

3. Preferred which free jib (3 or 3a)? mm

4. Wich hook clearance at 4 do you need for free jib 3 or 3a from... to...? mm

5. What is the available aisle width? mm

6. What is the required internal chassis width (only applicable to standard models)? mm

7. What is the required external chassis width? mm

8. Any special considerations such as ceiling load , lift dimensions, etc.?

9. What is the condition of the flooring or base?

10. Do you also require the crane to swivel?

☐ 90° ☐ 100° ☐ 180° ☐ 270° ☐ 360°

Do you require any further information or clarification? Please give us a call!

I would like to receive as follows:

☐ Your quote for a customised crane as per my requirement?


☐ Your quote for your standard model . .. .

☐ Information on your full range of products: stackers, presses, drum handling equipment

Prüfsiegel Hydrobull BGVD6

HydroBull® seit 1934

Europe‘s most comprehensive range of Floor Cranes

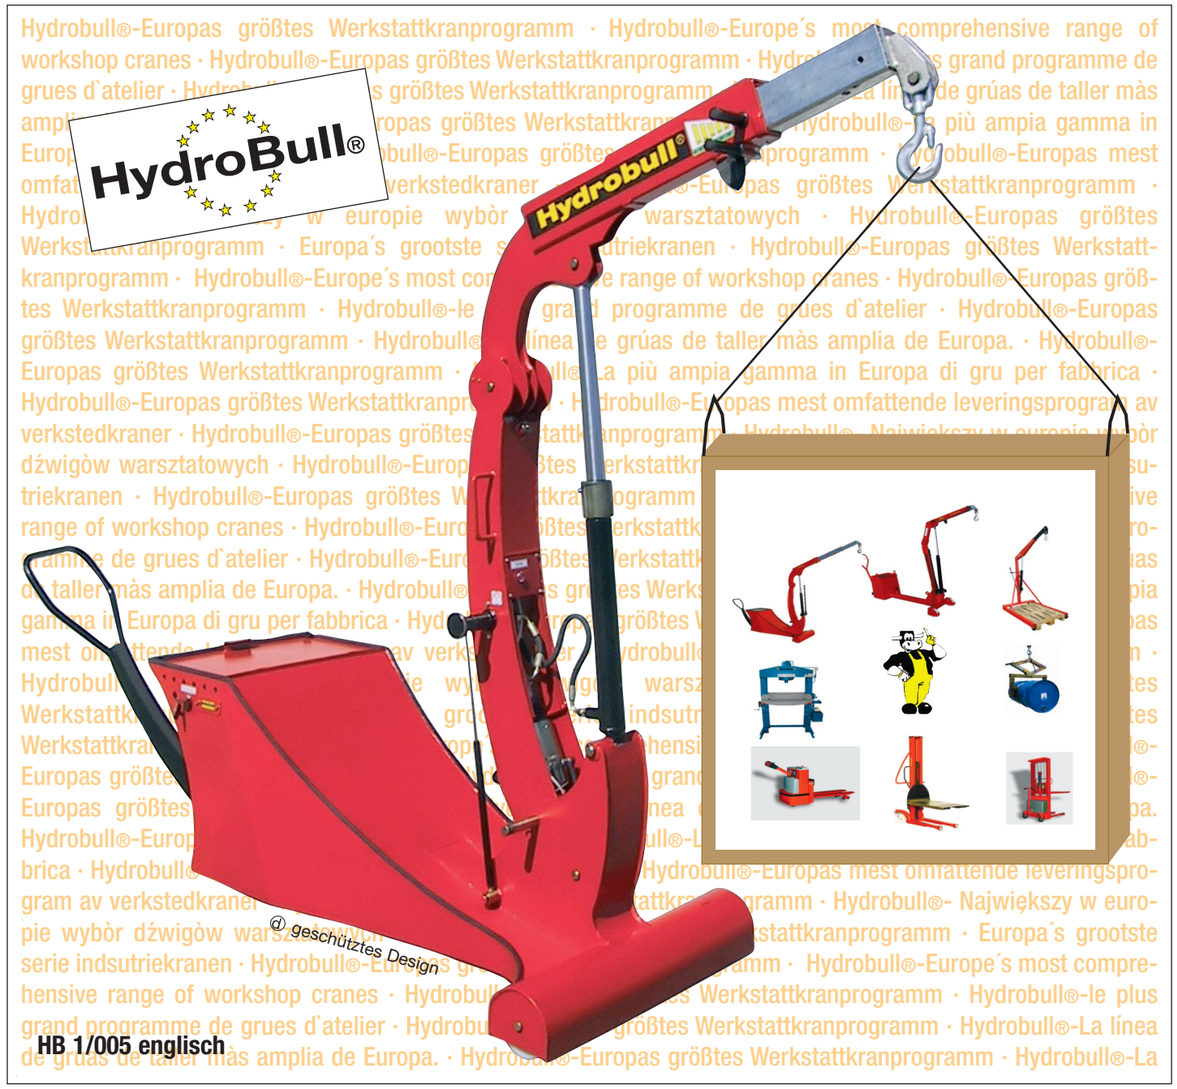

HB 1/005 englisch

Siegfried Frenzen GmbH

Hydrobull® Equipment

Am Nordkanal 21-25 · 47877 Willich

☎ +49 (0) 21 54 - 81 06 - 0 · +49 (0) 21 54 - 81 06 - 30

floorcranes@hydrobull.com · www.hydrobull.com